HIGH SPEED FLAGS ™

AnyTube™ Mount Installation

The mount is designed with adjustable hose-clamp style straps. Depending on your tube size, the tail end of the straps should be cut off to keep a low profile.

The easiest way to cut off the tail ends is by first removing the worm screws from the mount by pulling them straight out, wrapping the straps into position, and then trim away the tail ends with a scissors or side cutter. Doing this with the screws removed allows for a flush cut which is essential to avoid exposed sharp edges..

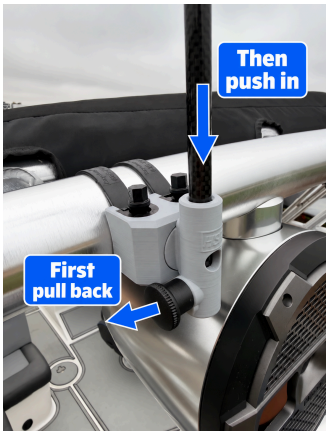

After the tails are trimmed to length, remove the adhesive backer, stick the mount into the desired position, and then insert and tighten the worm screws to the straps using the included hex tool.

Be careful not to overtighten the worm screw. It only needs to be finger tight!

Installing and removing the flag pole is easy, just pull straight back on the black knob, insert the flagpole, and twist the pole until the hole in the pole aligns with the pin on the knob. Make sure the knob fully seats.

Questions? Email support@inboardmarinedesign.com

Happy Boating!

www.inboardmarinedesign.com